





仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16





**主要技术参数 Main Specifications**

- 线 数 (Poles): 02 to 25
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$
- 额定电压 (Rated voltage): 30V AC DC
- 额定电流 (Rated current): 0.5A AC DC
- 耐 电 压 (Withstand Voltage): 200V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

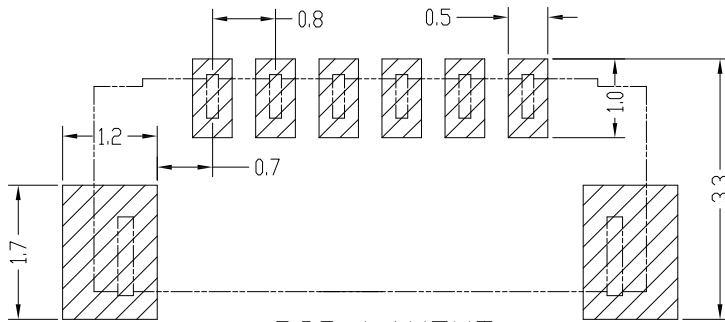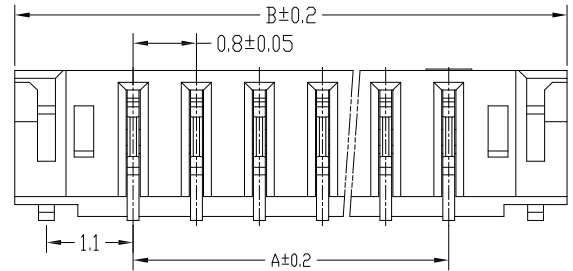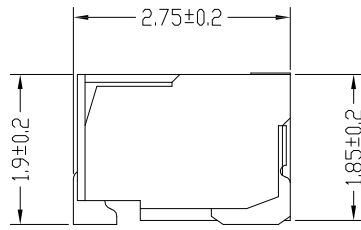

PCB LAYOUT

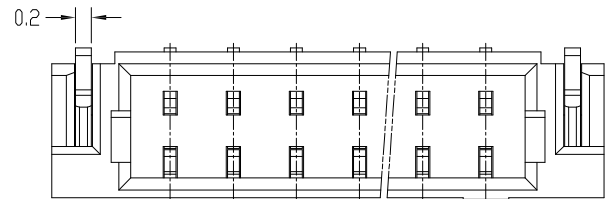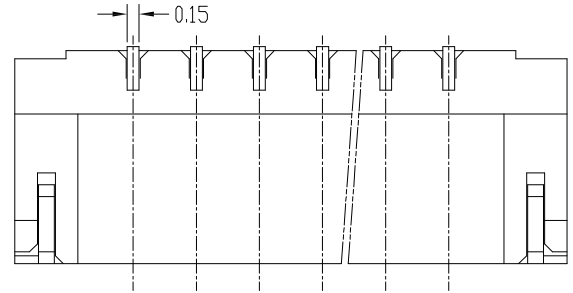

15	11.2	14.2
14	10.4	13.4
13	9.6	12.6
12	8.8	11.8
11	8.0	11.0
10	7.2	10.2
9	6.4	9.4
8	5.6	8.6
7	4.8	7.8
6	4.0	7.0
5	3.2	6.2
4	2.4	5.4
3	1.6	4.6
2	0.8	3.8
孔位	DIM A	DIM B

25	19.2	22.2
24	18.4	21.4
23	17.6	20.6
22	16.8	19.8
21	16.0	19.0
20	15.2	18.2
19	14.4	17.4
18	13.6	16.6
17	12.8	15.8
16	12.0	15.0
孔位	DIM A	DIM B

C	Soldet TAB		2 PCS	PhosphorBronze	Matte Sn-plated
B	CONTACT		n PCS	PhosphorBronze	Matte Sn-plated/GOLD
A	HOUSING		1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITFM	COMPONENT		QTY	MATERIAL	FINISH

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>深圳市思拓展电子有限公司</b> SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn    公司电话: 0755-23765350 邮 箱: 2850175982@qq.com    公司传真: 0755-23765341	PART. NO:	
	LINEAR	ANGLES	APPROVED				ST-WF-080-001AWR	
	0.0±0.30	X° REF±6°	DESIGNER				DWG. NO:	
	UNIT: MM	0.00±0.20	X° ±3°	DRAWN	肖坤权		2017.06.16	REV: A0    SHEET: 1/1
SIZE: A4	0.000±0.10	X° X'±2°						