



仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

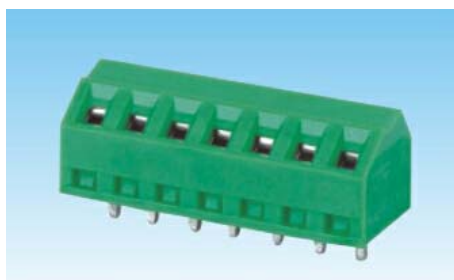

产品型号	MODEL	ST102
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M2.0, 钢, 镀锌 steel, Zinc Plated
弹片	Reed	黄铜, 镀镍 Brass, Ni plated
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated
塑件	Housing	PA66, UL94V-0
电气性能	ELECTRICAL	UL IEC
额定电压	Rated voltage	300V 130V/250V/450V
额定电流	Rated current	10A 10A/15A/15A
接触电阻	Contact resistance	20mΩ
绝缘电阻	Insulation resistance	500MΩ/1000V
耐电压	Withstanding voltage	AC1500V/1min
使用线径	Wire range	24-16AWG 1.5mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40°C~+105°C
瞬时温度	Max. soldering	+250°C, 5sec
扭矩	Torque	0. 2N.m 1. 7Lb. in
剥线长度	Strip length	4-5mm

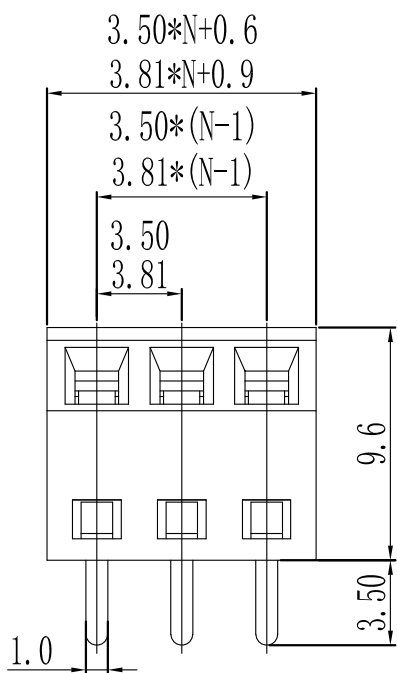

N=Number of Contacts

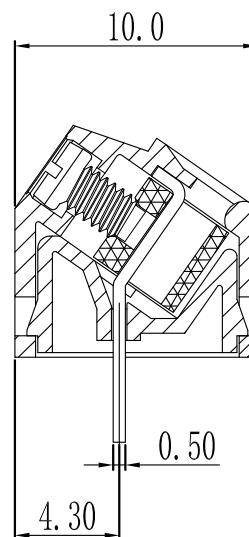

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-TB-0030	
	LINEAR	ANGLES					APPROVED	
	0. 0±0. 30	X° REF±6°	DESIGNER			TITLE:	Pitch 3.50/3.81mm	
UNIT: MM	0. 00±0. 20	X° ±3°	DRAWN	肖坤权	2017. 06. 16		REV:	A0
SIZE: A4	0. 000±0. 10	X° X'±2°					SHEET:	1/1