


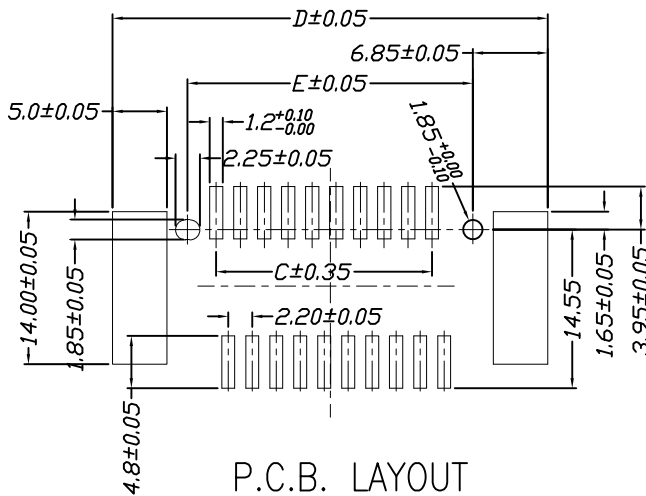
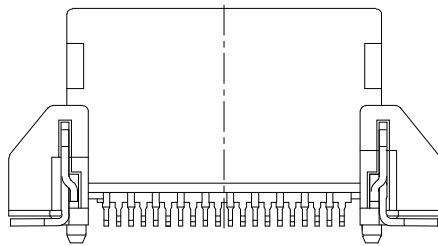


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16



Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+85°C

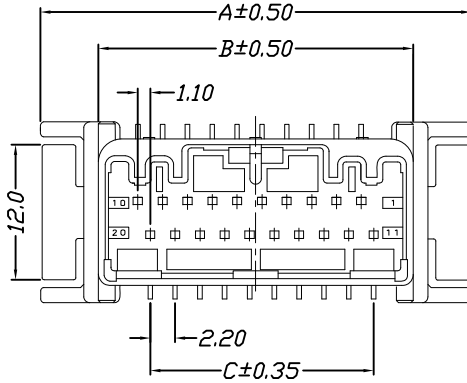

Poles	Dimensions				
	A	B	C	D	E
2*6P	29.40	19.10	11.00	31.10	17.40
2*8P	33.80	23.50	15.40	35.50	21.80
2*10P	38.20	27.90	19.80	39.90	26.20
2*12P	42.60	32.30	24.20	44.30	30.60
2*14P	47.00	36.70	28.60	48.70	35.00
2*16P	51.40	41.10	33.00	53.10	39.40
2*18P	55.80	45.50	37.40	57.50	43.80
2*20P	60.20	49.90	41.80	61.90	48.20

Material	Color	PIN Material
PBT or Nylon	Grey	Brass/Tin-plated

	GENERAL TOLERANCES		SCALE:	NAME	DATE
	LINEAR	ANGLES	1:1		
	0.0±0.35	X° REF±6°	APPROVED		
UNIT: MM	0.00±0.25	X° ±3°	DESIGNER		
SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2017.06.16

深圳市思拓展电子有限公司
 SHENZHEN SINOTOP ELECTRONICS CO., LTD
 公司地址: WWW.SZSITUA.CN 公司电话: 0755-23765350
 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341

PART. NO:	STP42202W00-2XNPX-A2-XX	
DWG. NO:		
REV:	A0	SHEET: 1/1

TITLE: 2.20mm Pitch 180° Dula Wafer SMT Type