
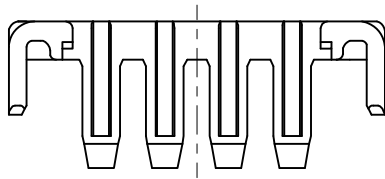

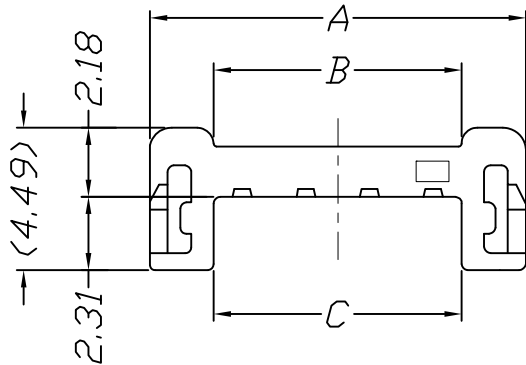
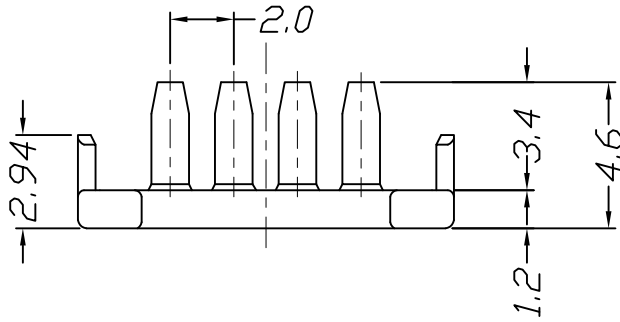


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:
 Voltage Rating : 125V AC/DC
 Current Rating : 2A AC,DC
 Withstand Voltage : 600V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C



Poles	Dimensions		
	A	B	C
2P	7.80	3.80	3.80
3P	9.80	5.80	5.80
4P	11.80	7.80	7.80
5P	13.80	9.80	9.80
6P	15.80	11.80	11.80
7P	17.80	13.80	13.80
8P	19.80	15.80	15.80
9P	21.80	17.80	17.80
10P	23.80	19.80	19.80
11P	25.80	21.80	21.80
12P	27.80	23.80	23.80
13P	29.80	25.80	25.80
14P	31.80	27.80	27.80
15P	33.80	29.80	29.80

Material	Color
PA66 UL94V-0	BLACK

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 销售热线: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP42012R01-NPX-66
	LINEAR	ANGLES					
UNIT: MM	0.0±0.35	X° REF±6°	DESIGNER			TITLE:	DWG. NO:
SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2017.06.16	2.00mm PITCH Retainer	REV: A0 SHEET: 1/1