
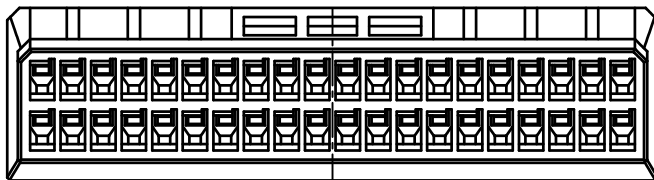
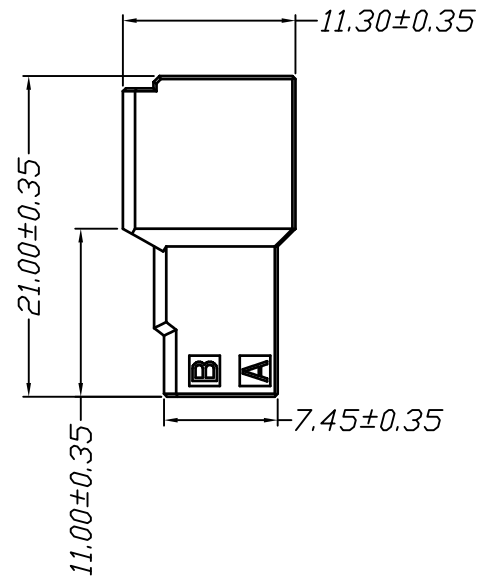
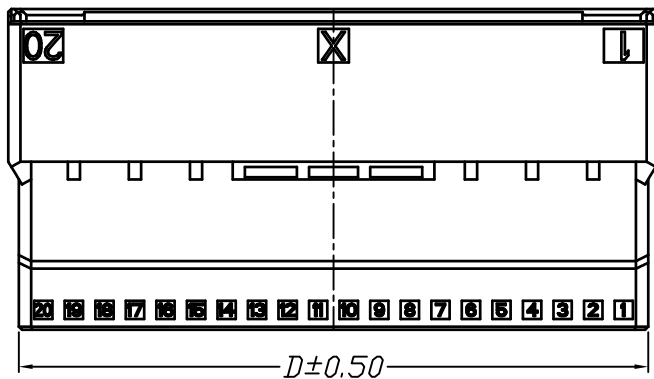


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -55°C~+105°C

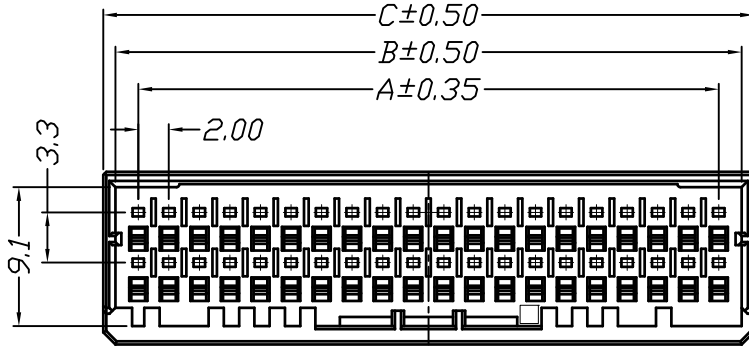

Poles	Dimensions			
	A	B	C	D
2*5P	8.0	11.0	12.6	11.2
2*10P	18.0	21.0	22.6	21.2
2*11P	20.0	23.0	24.6	23.2
2*13P	24.0	27.0	28.6	27.2
2*14P	26.0	29.0	30.6	29.2
2*16P	30.0	33.0	34.6	33.2
2*17P	32.0	35.0	36.6	35.2
2*20P	38.0	41.0	42.6	41.2

Material	Color
PBT UL94V-0	BLACK

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: www.szstuo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:	
	LINEAR	ANGLES					APPROVED	STP42001H00-2XNPA-2-PT
	0.0±0.35	X° REF±6°	DESIGNER	DWG. NO:				
UNIT: MM	0.00±0.25	X° ±3°	DRAWN	肖坤权	2017.06.16	TITLE:	REV: A0 SHEET: 1/1	
SIZE: A4	0.000±0.15	X° X'±2°				2.00mm PITCH Housing		