
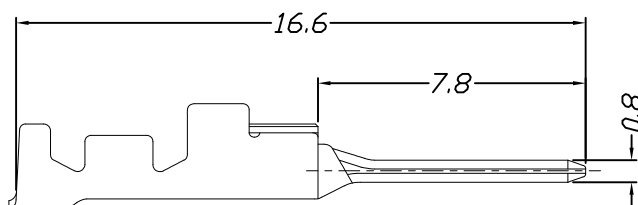


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 4.6A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -55°C~+105°C

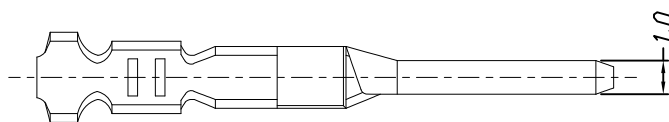

Part No	Wire Range	Insulation O. D.	Material	Finish	Qty/Reel
STP33502TOP-**	AWG #24~#28	0.88~1.43mm	Phosphor bronze	Au or Sn	
STP33502T1P-**	AWG #20~#24	1.11~1.53mm			
STP33502T2P-**	-	1.30~1.90mm			
STP33502T3P-**	AWG #20~#24	1.11~1.53mm			

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP33502TXP-XX	
	LINEAR	ANGLES	APPROVED				DWG. NO:	
	0.0±0.35	X° REF±6°	DESIGNER				TITLE: 3.50mm PITCH Crimp Terminal	REV: A0 SHEET: 1/1
	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	肖坤权		2017.06.16	
SIZE: A4	0.000±0.15	X° X'±2°						