
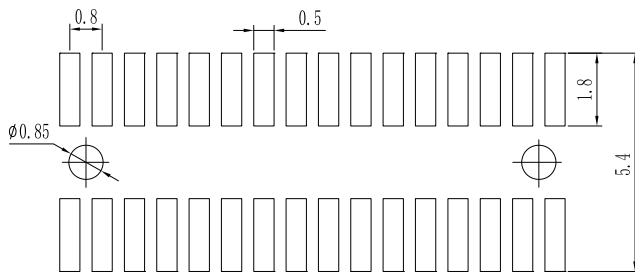

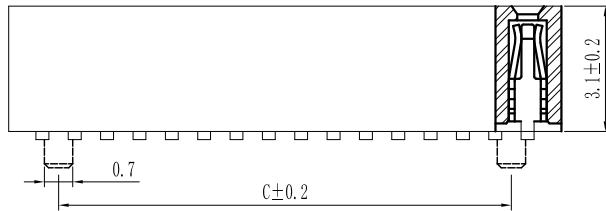

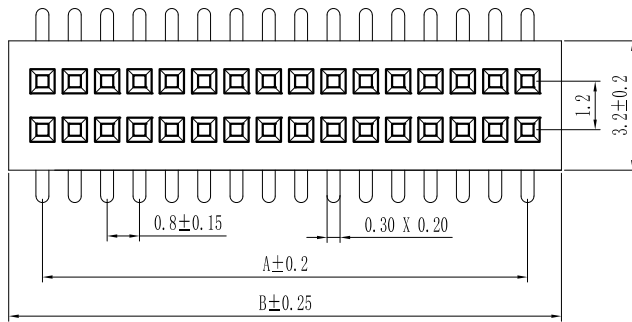


仅供参考

| | | |
|------|-----------------|------------|
| REV. | REVISION RECORD | DATE |
| A0 | 新图面发行 | 2017.06.16 |

Specification:
 Current Rating : 0.75AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 30mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PA6T/LCP
 Contact: Bronze
 Plating : Au or Sn Over 50u" Ni

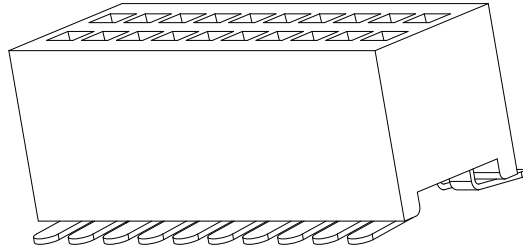

PCB LAYOUT

| Pin数 | 尺寸A | 尺寸B | 尺寸C |
|------|-------|-------|-------|
| 2x2 | 0.80 | 1.60 | 0 |
| 2x3 | 1.60 | 2.40 | 0.80 |
| 2x4 | 2.40 | 3.20 | 1.60 |
| 2x5 | 3.20 | 4.00 | 2.40 |
| 2x6 | 4.00 | 4.80 | 3.20 |
| 2x7 | 4.80 | 5.60 | 4.00 |
| 2x8 | 5.60 | 6.40 | 4.80 |
| 2x9 | 6.40 | 7.20 | 5.60 |
| 2x10 | 7.20 | 8.00 | 6.40 |
| 2x11 | 8.00 | 8.80 | 7.20 |
| 2x12 | 8.80 | 9.60 | 8.00 |
| 2x13 | 9.60 | 10.40 | 8.80 |
| 2x14 | 10.40 | 11.20 | 9.60 |
| 2x15 | 11.20 | 12.00 | 10.40 |
| 2x16 | 12.00 | 12.80 | 11.20 |
| 2x17 | 12.80 | 13.60 | 12.00 |
| 2x18 | 13.60 | 14.40 | 12.80 |
| 2x19 | 14.40 | 15.20 | 13.60 |
| 2x20 | 15.20 | 16.00 | 14.40 |
| 2x21 | 16.00 | 16.80 | 15.20 |
| 2x22 | 16.80 | 17.60 | 16.00 |
| 2x23 | 17.60 | 18.40 | 16.80 |
| 2x24 | 18.40 | 19.20 | 17.60 |
| 2x25 | 19.20 | 20.00 | 18.40 |
| 2x26 | 20.00 | 20.80 | 19.20 |
| 2x27 | 20.80 | 21.60 | 20.00 |
| 2x28 | 21.60 | 22.40 | 20.80 |
| 2x29 | 22.40 | 23.20 | 21.60 |
| 2x30 | 23.20 | 24.00 | 22.40 |
| 2x31 | 24.00 | 24.80 | 23.20 |
| 2x32 | 24.80 | 25.60 | 24.00 |
| 2x33 | 25.60 | 26.40 | 25.80 |
| 2x34 | 26.40 | 27.20 | 25.60 |
| 2x35 | 27.20 | 28.00 | 26.40 |
| 2x36 | 28.00 | 28.80 | 27.20 |
| 2x37 | 28.80 | 29.60 | 28.00 |
| 2x38 | 29.60 | 30.40 | 28.80 |
| 2x39 | 30.40 | 31.20 | 29.60 |
| 2x40 | 31.20 | 32.00 | 30.40 |
| 2x41 | 32.00 | 32.80 | 31.20 |
| 2x42 | 32.80 | 33.60 | 32.00 |
| 2x43 | 33.60 | 34.40 | 32.80 |
| 2x44 | 34.40 | 35.20 | 33.60 |
| 2x45 | 35.20 | 36.00 | 34.40 |
| 2x46 | 36.00 | 36.80 | 35.20 |
| 2x47 | 36.80 | 37.60 | 36.00 |
| 2x48 | 37.60 | 38.40 | 36.80 |
| 2x49 | 38.40 | 39.20 | 37.60 |
| 2x50 | 39.20 | 40.00 | 38.40 |

| | | | | | | | |
|----------|--------------------|-----------|---------------|------|------------|--|----------------|
| | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341 | PART. NO: |
| | LINEAR | ANGLES | | | | | ST-FH-080-0001 |
| UNIT: MM | 0.00±0.20 | X° REF±6° | APPROVED | | | | DWG. NO: |
| SIZE: A4 | 0.000±0.10 | X° X'±2° | DESIGNER | | | TITLE: | REV: A0 |
| | | | DRAWN | 肖坤权 | 2017.06.16 | 0.8*1.2mm Female Header, Dual Row, Plastic Height 3.1mm, SMT (with Local Peg) Type(U) | SHEET: 1/1 |