
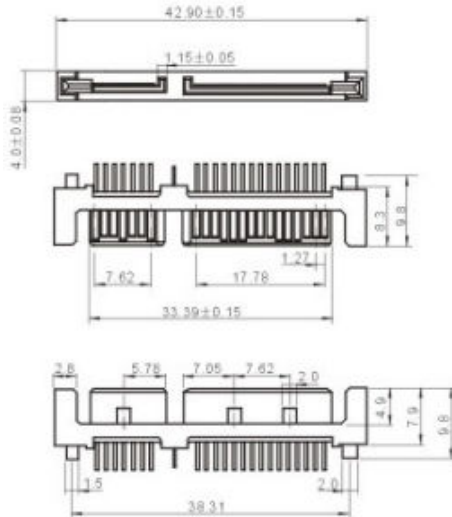




■ 材料 MATERIAL

- ◆ 外壳: LCP  
Housing: LCP
- ◆ 端子: 磷青铜  
Terminal: Phosphor bronze



■ 技术参数 SPECIFICATIONS

- ◆ 间距: 1.27  
Pitch: 1.27
- ◆ 线数: 7, 22  
Poles: 7, 22
- ◆ 适用线规: AWG#26~#30  
Applicable wire: AWG#26~#30
- ◆ 额定电压: 50V DC/AC(有效值)  
Voltage rating: 50V DC/AC (rms)
- ◆ 额定电流: 1.0A  
Current rating: 1.0A
- ◆ 耐压值: 500V AC(有效值)  
Withstand voltage: 500V AC(rms)
- ◆ 工作温度: -25℃~+85℃  
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: ≥500MΩ  
Insulation resistance: ≥500MΩ
- ◆ 接触电阻: ≤0.02Ω  
Contact resistance: ≤0.02Ω

思拓电子有限公司

SINOTOP ELECTRONICS CO., LIMITED

TEL:+86-0755-61511561 FAX:+86-0755-61280927

電話:0755-61511561 傳真:0755-61280927

批准	日期	比例	公差範圍	
		1:1	.0	±0.3
審核	單位	視圖	.00	±0.2
	m m		.000	±0.1
繪圖	編號	尺寸	角度	
		A4	±2°	

料號 ST-FPC-127-041

SATA 1.27MM