


孔位 Poles	A	B	C
4	3.75	6.25	8.5
5	5.0	7.5	9.75
6	6.25	8.75	11.0
7	7.5	10.0	12.25
8	8.75	11.25	13.5
9	10.0	12.5	14.75
10	11.25	13.75	16.0
11	12.5	15.0	17.25
12	13.75	16.25	18.5
13	15.0	17.5	19.75
14	16.25	18.75	21.0
15	17.5	20.0	22.25
16	18.75	21.25	23.5
17	20.0	22.5	24.75
18	21.25	23.75	26.0
19	22.5	25.0	27.25
20	23.75	26.25	28.5
21	25.0	27.5	29.75
22	26.25	28.75	31.0
23	27.5	30.0	32.25
24	28.75	31.25	33.5
25	30.0	32.5	34.75
26	31.25	33.75	36.0
27	32.5	35.0	37.25
28	33.75	36.25	38.5
29	35.0	37.5	39.75
30	36.25	38.75	41.0
31	37.5	40.0	42.25
32	38.75	41.25	43.5
33	40.0	42.5	44.75
34	41.25	43.75	46.0
35	42.5	45.0	47.25
36	43.75	46.25	48.5
37	45.0	47.5	49.75
38	46.25	48.75	51.0
39	47.5	50.0	52.25
40	48.75	51.25	53.5

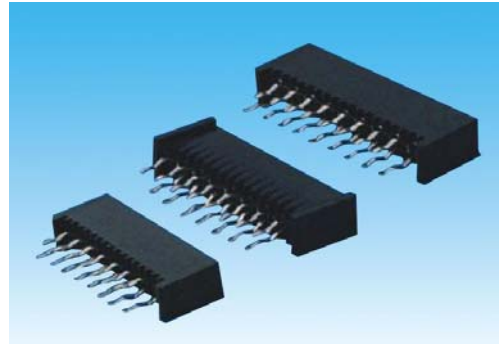

技术参数SPECIFICATIONS

极数: 4~40  
 Poles: 4~40  
 额定电压: AC, DC, 50V (50HZ有效值)  
 Voltage rating: AC, DC, 50V (500HZ有效值)  
 额定电流: 1A, AC, DC  
 Current rating: 1A, AC, DC  
 耐压值: 800V AC/minute  
 Withstang voltage: 800V AC/minute  
 工作温度: -25°C~+85°C  
 Working Temperature: -25°C~+85°C  
 绝缘电阻: ≥500MΩ  
 Insulation resistance: ≥500MΩ  
 接触电阻: ≤0.02Ω  
 Contact resistance: ≤0.02Ω  
 单面接触  
 Single Contact

接触件TERMINAL


材质: 磷青铜  
 Material: Phosphor Bronze

塑胶主体HOUSING

材质: 尼龙46, UL 94V-0  
 Material: Nylon46, UL 94V-0

包装方式PACKAGE

管装 Pipe Package  
 袋装 Bage Package

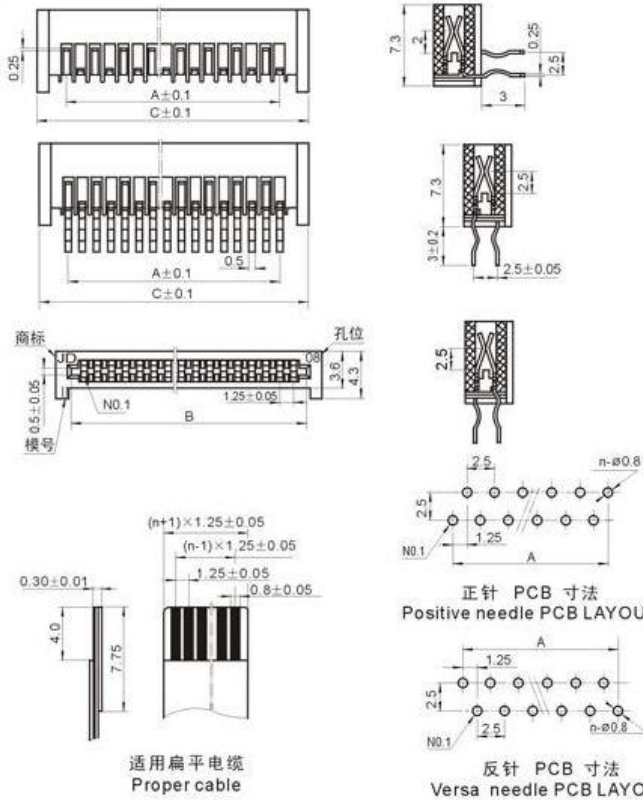

1.25C-L-nP

间距: (Pitch) \_\_\_\_\_  
 型号: (Model) \_\_\_\_\_  
 立式: L \_\_\_\_\_  
 Vertical pype: L \_\_\_\_\_  
 线数 (Hole location) \_\_\_\_\_

适用扁平电缆 Proper cable

正针 PCB 寸法 Positive needle PCB LAYOUT  
 反针 PCB 寸法 Versa needle PCB LAYOUT

思拓电子有限公司 SINOTOP ELECTRONICS CO., LIMITED TEL: +86-0755-61511561 FAX: +86-0755-61280927		批准	日期	比例	公差範圍	
				1:1	.0	±0.3
電話: 0755-61511561 傳真: 0755-61280927		審核	單位	視圖	.00	±0.2
				m m		.000
料號	ST-FPC-125-035	繪圖	編號	尺寸	角度	
FPC 1.25C-L				A4	±2°	