


| 孔位<br>Poles | A     | B     | C     |
|-------------|-------|-------|-------|
| 4           | 3.75  | 6.25  | 8.5   |
| 5           | 5.0   | 7.5   | 9.75  |
| 6           | 6.25  | 8.75  | 11.0  |
| 7           | 7.5   | 10.0  | 12.25 |
| 8           | 8.75  | 11.25 | 13.5  |
| 9           | 10.0  | 12.5  | 14.75 |
| 10          | 11.25 | 13.75 | 16.0  |
| 11          | 12.5  | 15.0  | 17.25 |
| 12          | 13.75 | 16.25 | 18.5  |
| 13          | 15.0  | 17.5  | 19.75 |
| 14          | 16.25 | 18.75 | 21.0  |
| 15          | 17.5  | 20.0  | 22.25 |
| 16          | 18.75 | 21.25 | 23.5  |
| 17          | 20.0  | 22.5  | 24.75 |
| 18          | 21.25 | 23.75 | 26.0  |
| 19          | 22.5  | 25.0  | 27.25 |
| 20          | 23.75 | 26.25 | 28.5  |
| 21          | 25.0  | 27.5  | 29.75 |
| 22          | 26.25 | 28.75 | 31.0  |
| 23          | 27.5  | 30.0  | 32.25 |
| 24          | 28.75 | 31.25 | 33.5  |
| 25          | 30.0  | 32.5  | 34.75 |
| 26          | 31.25 | 33.75 | 36.0  |
| 27          | 32.5  | 35.0  | 37.25 |
| 28          | 33.75 | 36.25 | 38.5  |
| 29          | 35.0  | 37.5  | 39.75 |
| 30          | 36.25 | 38.75 | 41.0  |
| 31          | 37.5  | 40.0  | 42.25 |
| 32          | 38.75 | 41.25 | 43.5  |
| 33          | 40.0  | 42.5  | 44.75 |
| 34          | 41.25 | 43.75 | 46.0  |
| 35          | 42.5  | 45.0  | 47.25 |
| 36          | 43.75 | 46.25 | 48.5  |
| 37          | 45.0  | 47.5  | 49.75 |
| 38          | 46.25 | 48.75 | 51.0  |
| 39          | 47.5  | 50.0  | 52.25 |
| 40          | 48.75 | 51.25 | 53.5  |




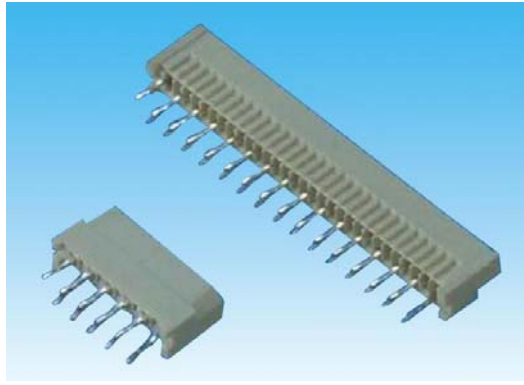


技术参数SPECIFICATIONS


极数: 4~40  
 Poles: 4~40  
 额定电压: AC, DC, 50V (50HZ有效值)  
 Voltage rating: AC, DC, 50V (500HZ有效值)  
 额定电流: 0.5A, AC, DC  
 Current rating: 0.5A, AC, DC  
 耐压值: 500V AC/minute  
 Withstang voltage: 500V AC/minute  
 工作温度: -25℃~+85℃  
 Working Temperature: -25℃~+85℃  
 绝缘电阻: ≥800MΩ  
 Insulation resistance: ≥800MΩ  
 接触电阻: ≤0.02Ω  
 Contact resistance: ≤0.02Ω  
 单面接触  
 Single Contact

接触件TERMINAL


材质: 磷青铜  
 Material: Phosphor Bronze  
 塑胶主体HOUSING  
 材质: 尼龙46, UL 94V-0  
 Material: Nylon46, UL 94V-0  
 包装方式PACKAGE  
 管装 Pipe Package  
 袋装 Bage Package

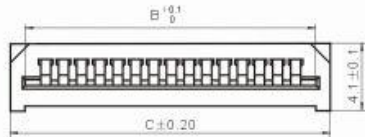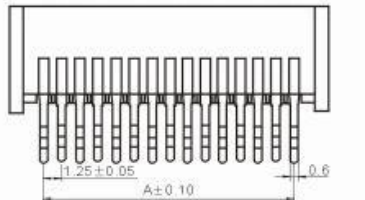


安装图  
ASSEMBLY LAYOUT



适用扁平电缆  
Proper cable



正针 PCB 寸法  
Positive needle PCB LAYOUT



反针 PCB 寸法  
Versa needle PCB LAYOUT

1.25A-L-nP F

间距: (Pitch) \_\_\_\_\_  
 型号: (Model) \_\_\_\_\_  
 立式: L \_\_\_\_\_  
 Vertical type: L \_\_\_\_\_  
 线数 (Hole location) \_\_\_\_\_  
 反针: F (正针: 无) \_\_\_\_\_  
 Reversed pointer: F (none for positive pointer)

思拓电子有限公司  
 SINOTOP ELECTRONICS CO., LIMITED  
 TEL: +86-0755-61511561 FAX: +86-0755-61280927  
 電話: 0755-61511561 傳真: 0755-61280927

| 批准 | 日期 | 比例  | 公差範圍 |      |
|----|----|-----|------|------|
|    |    | 1:1 | .0   | ±0.3 |
| 審核 | 單位 | 視圖  | .00  | ±0.2 |
|    | mm |     | .000 | ±0.1 |
| 繪圖 | 編號 | 尺寸  | A4   | ±2°  |

料號 ST-FPC-125-032

FPC 1.25A-L