


F/R Pole	A	B	C
4	3.0	7.1	5.1
5	4.0	8.1	6.1
6	5.0	9.1	7.1
7	6.0	10.1	8.1
8	7.0	11.1	9.1
9	8.0	12.1	10.1
10	9.0	13.1	11.1
11	10.0	14.1	12.1
12	11.0	15.1	13.1
13	12.0	16.1	14.1
14	13.0	17.1	15.1
15	14.0	18.1	16.1
16	15.0	19.1	17.1
17	16.0	20.1	18.1
18	17.0	21.1	19.1
19	18.0	22.1	20.1
20	19.0	23.1	21.1
21	20.0	24.1	22.1
22	21.0	25.1	23.1
23	22.0	26.1	24.1
24	23.0	27.1	25.1
25	24.0	28.1	26.1
26	25.0	29.1	27.1
27	26.0	30.1	28.1
28	27.0	31.1	29.1
29	28.0	32.1	30.1
30	29.0	33.1	31.1
31	30.0	34.1	32.1
32	31.0	35.1	33.1
33	32.0	36.1	34.1
34	33.0	37.1	35.1
35	34.0	38.1	36.1
36	35.0	39.1	37.1
37	36.0	40.1	38.1
38	37.0	41.1	39.1
39	38.0	42.1	40.1
40	39.0	43.1	41.1

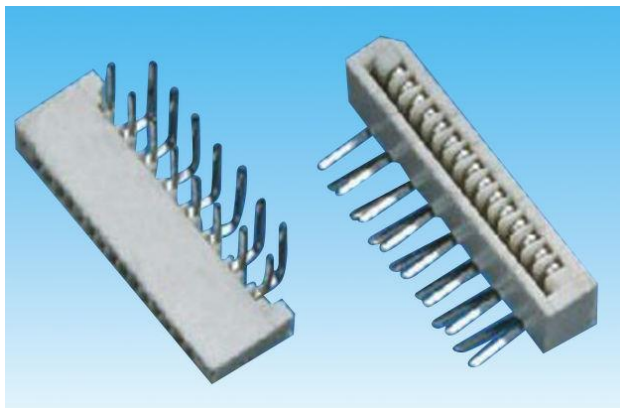


技术参数SPECIFICATIONS

极数: 4~40  
 Poles:4~40  
 额定电压: AC, DC, 50V (50HZ有效值)  
 Voltage rating:AC, DC, 50V (50HZ有效值)  
 额定电流: 0.5A, AC, DC  
 Current rating:0.5A, AC, DC  
 耐压值: 500V AC/minute  
 Withstang voltage:500V AC/minute  
 工作温度: -25℃~+85℃  
 Working Temperature:-25℃~+85℃  
 绝缘电阻: ≥800MΩ  
 Insulation resistance:≥800MΩ  
 接触电阻: ≤0.02Ω  
 Contact resistance: ≤0.02Ω  
 单面接触  
 Single Contact

接触件TERMINAL

材质: 磷青铜  
 Material:Phosphor Bronze  
 塑胶主体HOUSING  
 材质: 尼龙46, UL 94V-0  
 Material:Nylon46, UL 94V-0  
 包装方式PACKAGE  
 管装 Pipe Package  
 盒装 Box Package

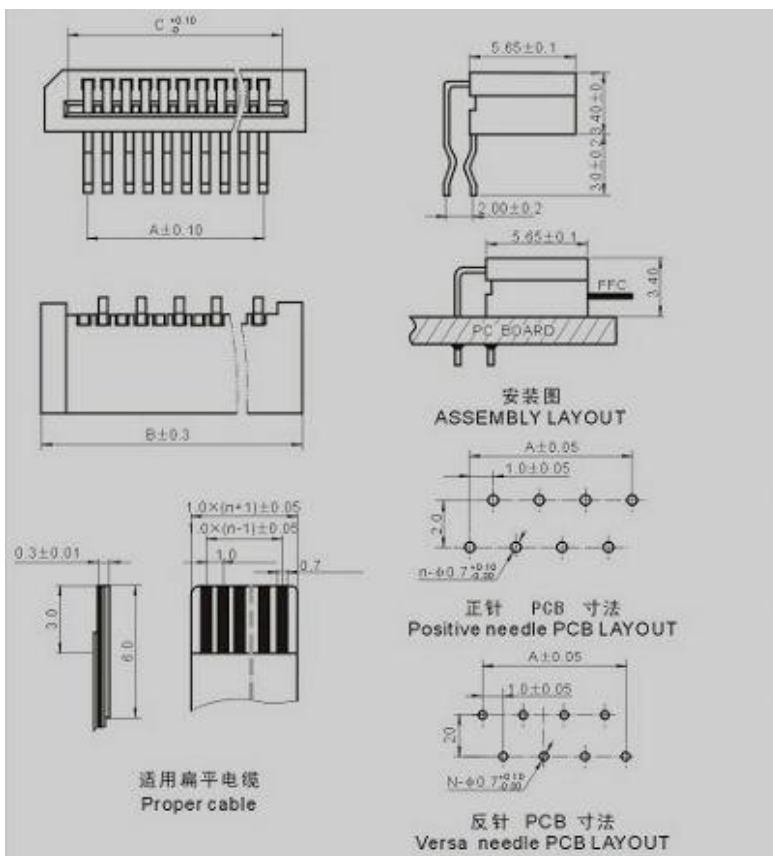

1.0A-W S-nPF  
 间距: (Pitch) \_\_\_\_\_  
 型号: (Model) \_\_\_\_\_  
 卧式: W \_\_\_\_\_  
 Horizontal type:W \_\_\_\_\_  
 上接点: S \_\_\_\_\_  
 Top of contact:S \_\_\_\_\_  
 线数 (Hole location) \_\_\_\_\_  
 反针: F (正针无) \_\_\_\_\_  
 Reversed pointer:F(none for positive pointer)

思拓电子有限公司 SINOTOP ELECTRONICS CO., LIMITED TEL:+86-0755-61511561 FAX:+86-0755-61280927 電話:0755-61511561 傳真:0755-61280927		批准	日期	比例	公差範圍	
				1:1	.0	±0.3
		審核	單位	視圖	.00	±0.2
			mm		.000	±0.1
料號	ST-FPC-10-013	繪圖	編號	尺寸	角度	
FPC 1.0A-WS				A4	±2°	