




孔位 Poles	A	B	C	D
15	6.1	4.90	3.60	4.20
17	6.70	5.40	4.20	5.40
21	7.90	6.60	5.40	6.00
23	8.50	7.20	6.00	6.60
25	9.10	7.80	6.60	7.20
27	9.70	8.40	7.20	8.40
31	10.90	9.60	8.40	9.00
33	11.50	10.20	9.00	10.20
37	12.70	11.40	10.20	10.80
39	13.30	12.00	10.80	

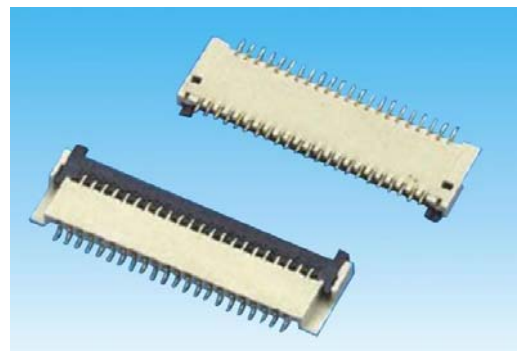

技术参数SPECIFICATIONS
 极数: 15~71
 Poles: 15~71
 额定电压: AC, DC, 30V (50HZ有效值)
 Voltage rating: AC, DC, 30V (50HZ有效值)
 额定电流: 0.3A, AC, DC
 Current rating: 0.3A, AC, DC
 耐压值: 100V AC/minute
 Withstang voltage: 100V AC/minute
 工作温度: -10°C~+50°C
 Working Temperature: -10°C~+50°C
 绝缘电阻: ≥500MΩ
 Insulation resistance: ≥500MΩ
 接触电阻: ≤0.1Ω
 Contact resistance: ≤0.1Ω
 单面接触
 Single Contact

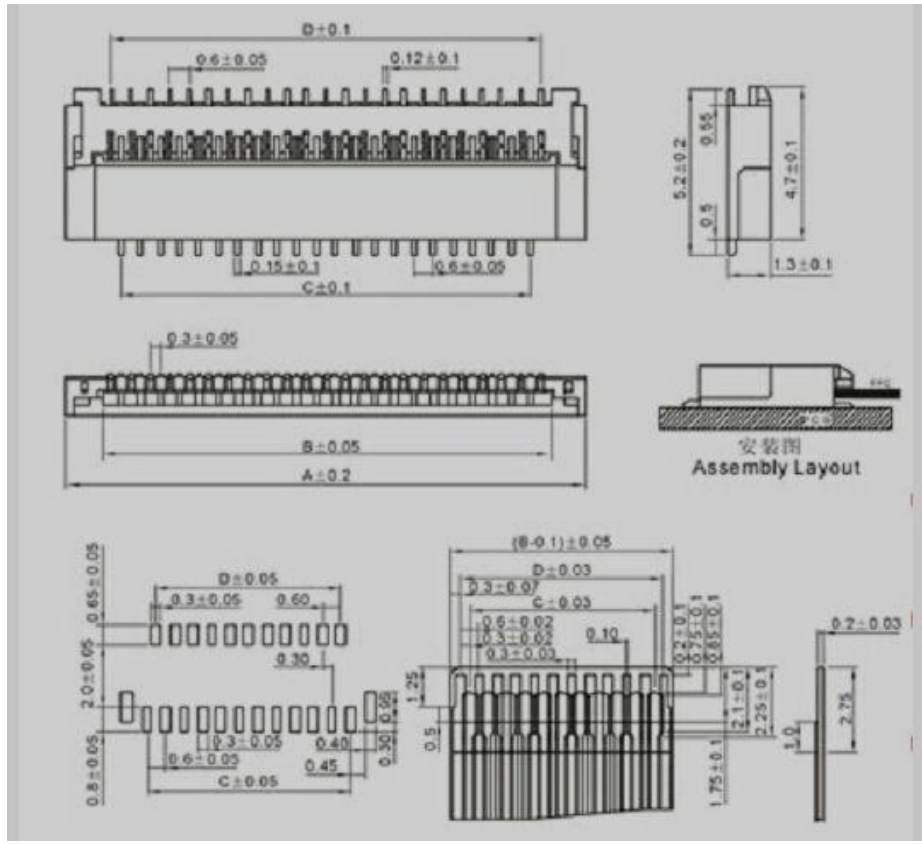

接触件TERMINAL
 材质: 磷青铜
 Material: Phosphor Bronze
 塑胶主体HOUSING
 材质: 尼龙46, UL 94V-0
 Material: Thermopiastic: 尼龙46, UL 94V-0
 包装方式PACKAGE
 管装 Pipe Package

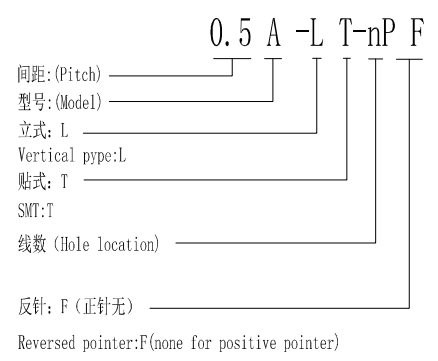

思拓电子有限公司 SINOTOP ELECTRONICS CO., LIMITED TEL: +86-0755-61511561 FAX: +86-0755-61280927		批准	日期	比例	公差範圍	
				1:1	.0	±0.3
電話: 0755-61511561 傳真: 0755-61280927		審核	單位	視圖	.00	±0.2
			m m		.000	±0.1
料號	ST-FPC-03-002	繪圖	編號	尺寸	角度	
FPC 0.3-H1.3MM				A4	±2°	