



仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16



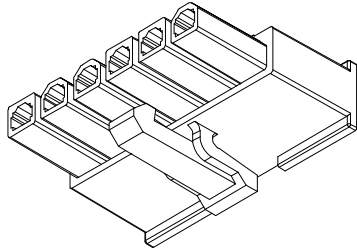


主要技术参数 Main Specifications


线数 (Poles): 02 to 06  
 接触电阻 (Contact resistance):  $\leq 15m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 300V AC DC  
 额定电流 (Rated current): 9.0A AC DC  
 耐电压 (Withstand Voltage): 1500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

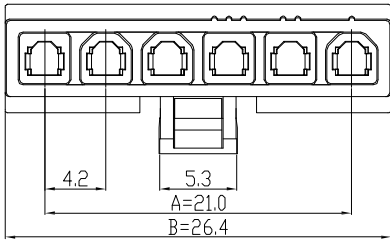


6P

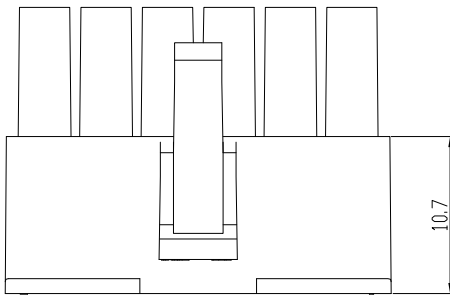


2P



3P



4P



5P

Poles	Dimensions mm	
	A	B
2	4.20	9.60
3	8.40	13.80
4	12.60	18.00
5	16.80	22.20
6	21.00	26.40

1	Housing 胶壳	PA66 (UL94V-0/V-2)	1	Transparent or Black 透明白色/黑色	
序号	图号	名称	材料	数量	附注

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
	LINEAR	ANGLES			
	0.0±0.30	X° REF±6°	APPROVED		
UNIT: MM	0.00±0.20	X° ±3°	DESIGNER		
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16

深圳市思拓展电子有限公司  
 SHENZHEN SINOTOP ELECTRONICS CO., LTD  
 公司网址: www.szstuo.cn 公司电话: 0755-23765350  
 邮箱: 2850175982@qq.com 公司传真: 0755-23765341

TITLE: 4.20mm PITCH HOUSING

PART. NO:	ST-WF-420-001Y1
DWG. NO:	
REV:	A0
SHEET:	1/1

A B C D E F G H