



仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

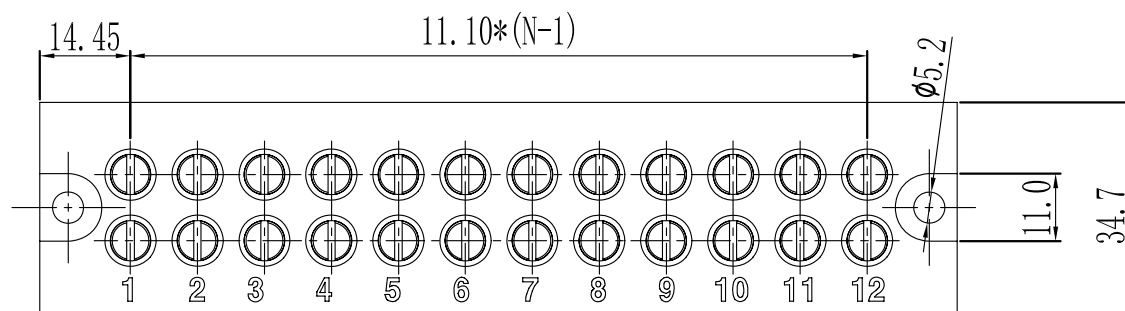

产品型号	MODEL	ST20H
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M5.0, 钢, 镀锌 steel, Zinc Plated
触点	Contact	铝 Aluminum
焊针	Pin header	磷青铜 Phosphor Bronze
塑件	Housing	Nylon PA66, UL94V-2
电气性能	ELECTRICAL	
额定电压	Rated voltage	500V
额定电流	Rated current	to EN60998:76A
接触电阻	Contact resistance	-
绝缘电阻	Insulation resistance	-
耐电压	Withstanding voltage	-
使用线径	Wire range	6.0-16.0mm <sup>2</sup>
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+110℃
瞬时温度	Max. soldering	KD20H
扭矩	Torque	H
剥线长度	Strip length	No. of pole 12pole

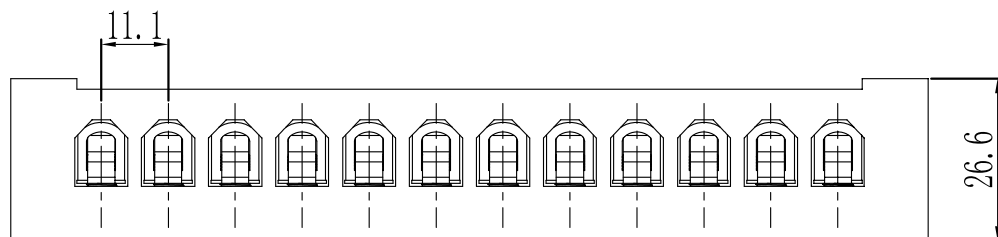

N=Number of Contacts

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn      公司电话: 0755-23765350 邮 箱: 2850175982@qq.com      公司传真: 0755-23765341	PART. NO: ST-TB-0192
	LINEAR	ANGLES	APPROVED				DWG. NO:
UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER			TITLE: Pitch11.00mm	REV: A0
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16	Feed Through Terminal Blocks	SHEET: 1/1