





仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16


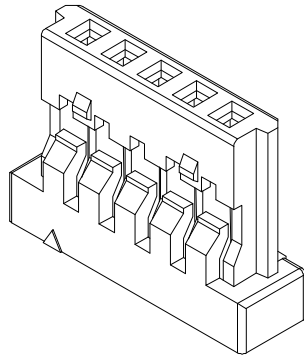


**主要技术参数 Main Specifications**

- 线数 (Poles): 02 to 30
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 500M\Omega$
- 额定电压 (Rated voltage): 150V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

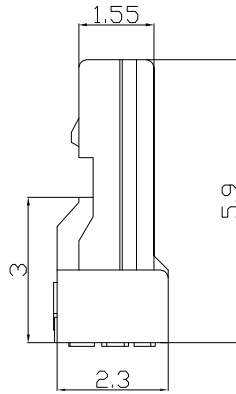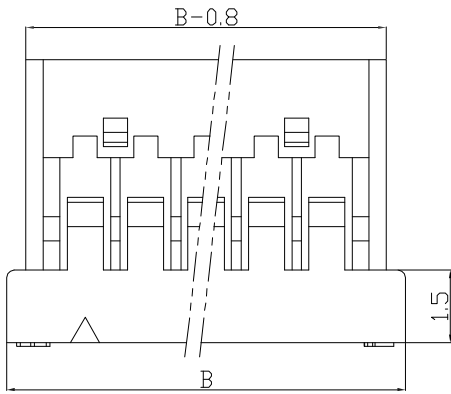

注意无泡点!

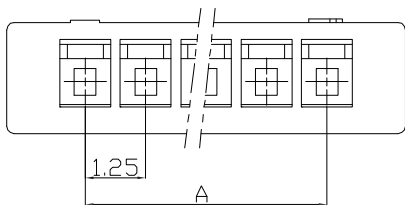

Poles	Dimensions mm	
	A	B
2	1.25	4.5
3	2.50	5.75
4	3.75	7.0
5	5.00	8.25
6	6.25	9.5
7	7.50	10.75
8	8.75	12.0
9	10.00	13.25
10	11.25	14.5
11	12.50	15.75
12	13.75	17.0
13	15.00	18.25
14	16.25	19.5
15	17.50	20.75
16	18.75	22.0
17	20.00	23.25
18	21.25	24.5
19	22.50	25.75
20	23.75	27.0
—	—	—
30	36.25	39.5

1	Housing 胶壳	PA66 (UL94V-0/V-2)	1		
序号	图号	名称	材料	数量	附注

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
	LINEAR	ANGLES	APPROVED		
	0.0 ± 0.30	X° REF ± 6°	DESIGNER		
	UNIT: MM	0.00 ± 0.20	X° ± 3°	DRAWN	肖坤权
SIZE: A4	0.000 ± 0.10	X° X' ± 2°			

深圳市思拓展电子有限公司  
 SHENZHEN SINOTOP ELECTRONICS CO., LTD  
 公司网址: www.szstuo.cn 公司电话: 0755-23765350  
 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341

TITLE: 1.25mm PITCH HOUSING

PART. NO:	ST-WF-125-006Y
DWG. NO:	
REV:	A0
SHEET:	1/1