
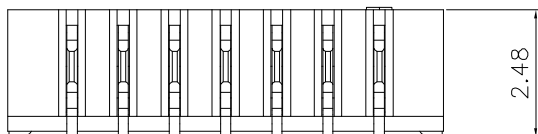
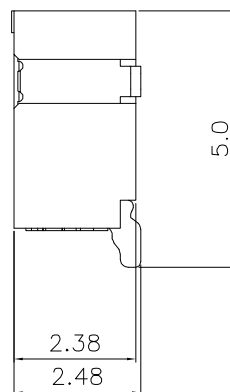


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

主要技术参数
Main Specifications

线数 (poles): 2 to 20P
 额定电流 (Current rating): 1.0A AC, DC
 额定电压 (Voltage rating): 50V AC, DC
 温度范围 (Temperature range): -25°C to +85°C
 接触电阻 (Contact resistance): ≤20mΩ
 绝缘电阻 (Insulation resistance): ≥100mΩ
 耐电压 (Withstand voltage): 500V AC/minute
 适用线规 (Applicable wire): AWG #32 to #28

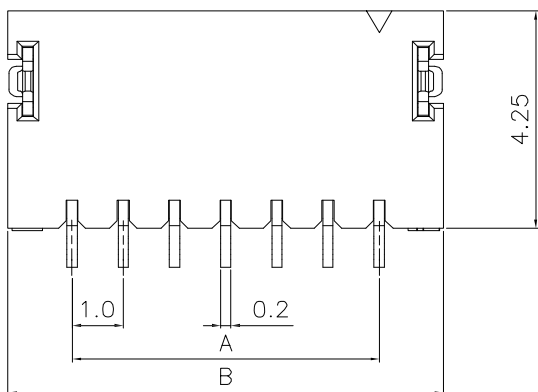

Poles	Dimensions mm	
	A	B
2	1.0	3.5
3	2.0	4.5
4	3.0	5.5
5	4.0	6.5
6	5.0	7.5
7	6.0	8.5
8	7.0	9.5
9	8.0	10.5
10	9.0	11.5
11	10.0	12.5
12	11.0	13.5
13	12.0	14.5
14	13.0	15.5
15	14.0	16.5
16	15.0	17.5
17	16.0	18.5
18	17.0	9.5
19	18.0	20.5
20	19.0	21.5

3	焊片	Phos Bronze tin 磷青铜锡	2		
2	针脚	Phos Bronze tin 磷青铜锡	N		
1	基座	LCP UL94V-0	1	本色	
序号	名称/料号	材料	每只用量 Each Amount	数量	附注

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
	LINEAR	ANGLES	APPROVED		
	0.0±0.30	X° REF±6°	DESIGNER		
	UNIT: MM	0.00±0.20	X° ±3°	DRAWN	肖坤权
SIZE: A4	0.000±0.10	X° X'±2°			

深圳市思拓展电子有限公司
 SHENZHEN SINOTOP ELECTRONICS CO., LTD
 公司网址: www.szstuo.cn 公司电话: 0755-23765350
 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341

TITLE:
1.0mmPITCH 90° WAFER SMT TYPE

PART. NO:	ST-WF-100-003AW
DWG. NO:	
REV:	A0
SHEET:	1/1

A B C D E F G H