

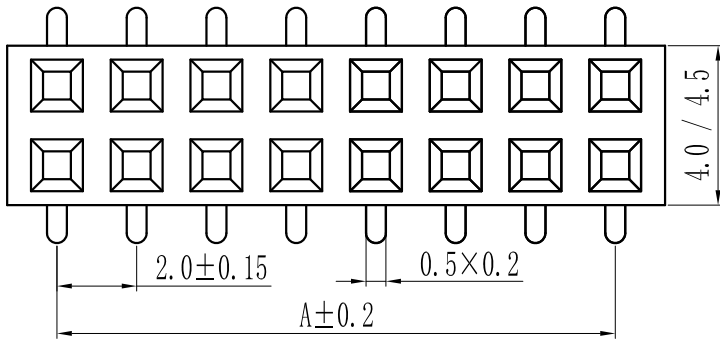




仅供参考

|      |                 |            |
|------|-----------------|------------|
| REV. | REVISION RECORD | DATE       |
| A0   | 新图面发行           | 2017.06.16 |


Specification:  
 Current Rating : 2AMP  
 Temperature Range : -40°C to +105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard: PA6T/LCP  
 Contact: Bronze  
 Plating : Au or Sn Over 50u" Ni

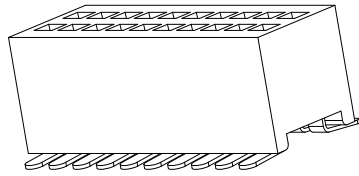

| Pin数 | 尺寸A  | 尺寸B  |
|------|------|------|
| 2×2  | 2.0  | 4.5  |
| 2×3  | 4.0  | 6.5  |
| 2×4  | 6.0  | 8.5  |
| 2×5  | 8.0  | 10.5 |
| 2×6  | 10.0 | 12.5 |
| 2×7  | 12.0 | 14.5 |
| 2×8  | 14.0 | 16.5 |
| 2×9  | 16.0 | 18.5 |
| 2×10 | 18.0 | 20.5 |
| 2×11 | 20.0 | 22.5 |
| 2×12 | 22.0 | 24.5 |
| 2×13 | 24.0 | 26.5 |
| 2×14 | 26.0 | 28.5 |
| 2×15 | 28.0 | 30.5 |
| 2×16 | 30.0 | 32.5 |
| 2×17 | 32.0 | 34.5 |
| 2×18 | 34.0 | 36.5 |
| 2×19 | 36.0 | 38.5 |
| 2×20 | 38.0 | 40.5 |
| 2×21 | 40.0 | 42.5 |
| 2×22 | 42.0 | 44.5 |
| 2×23 | 44.0 | 46.5 |
| 2×24 | 46.0 | 48.5 |
| 2×25 | 48.0 | 50.5 |
| 2×26 | 50.0 | 52.5 |
| 2×27 | 52.0 | 54.5 |
| 2×28 | 54.0 | 56.5 |
| 2×29 | 56.0 | 58.5 |
| 2×30 | 58.0 | 60.5 |
| 2×31 | 60.0 | 62.5 |
| 2×32 | 62.0 | 64.5 |
| 2×33 | 64.0 | 66.5 |
| 2×34 | 66.0 | 68.5 |
| 2×35 | 68.0 | 70.5 |
| 2×36 | 70.0 | 72.5 |
| 2×37 | 72.0 | 74.5 |
| 2×38 | 74.0 | 76.5 |
| 2×39 | 76.0 | 78.5 |
| 2×40 | 78.0 | 80.5 |

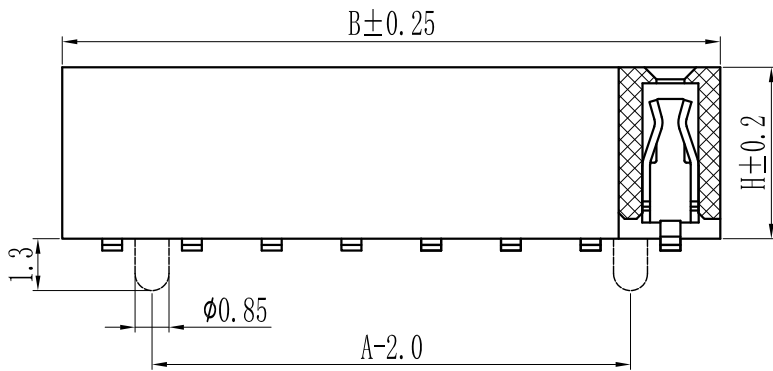

PCB LAYOUT

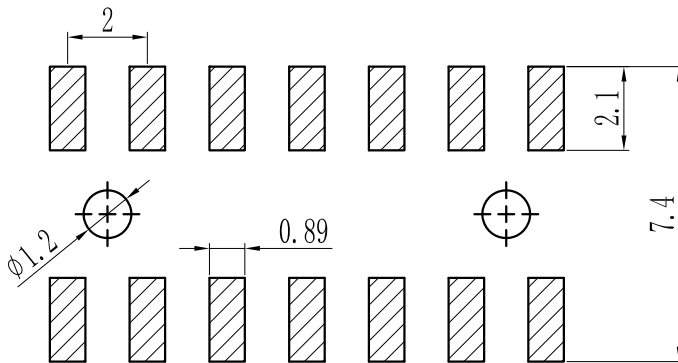

|     |
|-----|
| H   |
| 4.0 |
| 4.3 |
| 4.6 |

|          |                    |           |            |        |  |   |                             |            |
|----------|--------------------|-----------|------------|--------|--|---|-----------------------------|------------|
|          | GENERAL TOLERANCES |           | SCALE: 1:1 | NAME   | DATE   | 深圳市思拓展电子有限公司<br>SHENZHEN SINOTOP ELECTRONICS CO., LTD<br>公司网址: www.szsituo.cn      公司电话: 0755-23765350<br>邮 箱: 2850175982@qq.com      公司传真: 0755-23765341 | PART. NO:<br>ST-FH-200-0080 |            |
|          | LINEAR             | ANGLES    |            |        |  |   | APPROVED                    | DWG. NO:   |
| UNIT: MM | 0.0±0.30           | X° REF±6° | DESIGNER   | TITLE: | Pitch2.0mm Female Header, Dual Row, Plastic Height Hmm, SMT (with Local Peg) Type(U) |   | REV: A0                     | SHEET: 1/1 |
| SIZE: A4 | 0.000±0.10         | X° X'±2°  | DRAWN      | 肖坤权    | 2017.06.16   |   |                             |            |