






仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

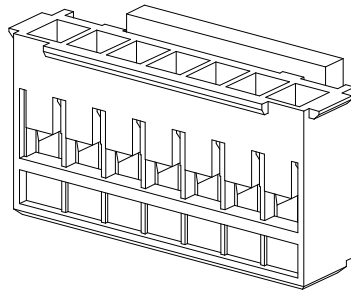

**主要技术参数 Main Specifications**

- 线数 (Poles): 02 to 16
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

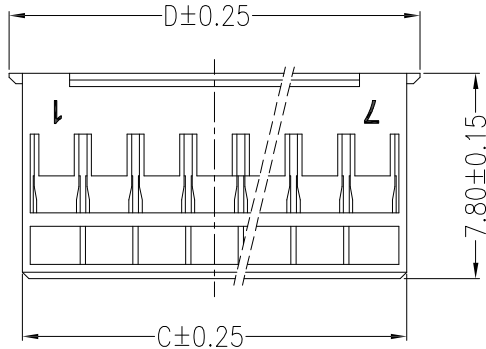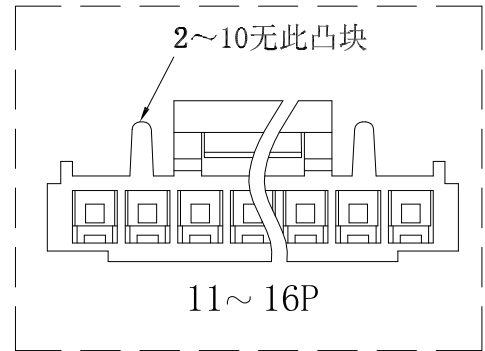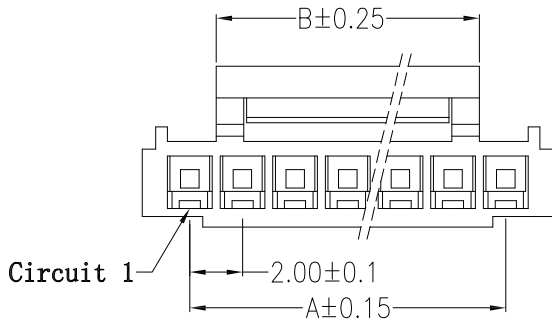

Circuits	Dimensions (mm)			
	A	B	C	D
02	2.00	3.20	4.60	5.60
03	4.00	4.00	6.60	7.60
04	6.00	5.00	8.60	9.60
05	8.00	6.20	10.60	11.60
06	10.00	8.20	12.60	13.60
07	12.00	10.20	14.60	15.60
08	14.00	12.20	16.60	17.60
09	16.00	14.20	18.60	19.60
10	18.00	16.20	20.60	21.60
11	20.00	16.20	22.60	23.60
12	22.00	16.20	24.60	25.60
13	24.00	16.20	26.60	27.60
14	26.00	16.20	28.60	29.60
15	28.00	16.20	30.60	31.60
16	30.00	18.20	32.60	33.60

A	HOUSING	1 PCS	PA66	COLOR:BEIGE
ITFM	COMPONENT	Q'TY	MATERIAL	FINISH

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szstuo.cn    公司电话: 0755-23765350 电子邮箱: 2850175982@qq.com    公司传真: 0755-23765341	PART. NO:
	LINEAR	ANGLES					APPROVED
	0.0±0.30	X° REF±6°	DESIGNER	DWG. NO:			
	UNIT: MM	0.00±0.20	X° ±3°	TITLE:	REV: A0		SHEET: 1/1
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16	2.00mmPITCH HOUSING	

A B C D E F G H